harmer & simmons

[5G CONNECTING]

PROTECT ECO+R
HSR483_UHE



- Maximum efficiency > 98%
- Power derating from 55° to 75°C
- Output power derating at <176VAC
- High power density

Brand	Family	Model	Rating (W)	Efficiency
H&S	Protect Eco+R	HSR483_UHE	3000	98%

KEY FEATURES

In today's intensely competitive business sphere, amid escalating apprehensions regarding global warming, telecom Original Equipment Manufacturers (OEMs) and Service Providers are meticulously evaluating their operational outlays.

Why Opt for Our Services?

Cost-Effective Solutions:
We acknowledge the imperative of maintaining competitiveness in the market. Hence, our offerings are not only efficient but also financially prudent.

Heightened Efficiency:
Our products are meticulously crafted to maximize efficiency, ensuring optimal utilization of resources.

Adaptability to Elevated Temperatures:
With our cutting-edge technology, operations at elevated temperatures become seamless. Bid farewell to the necessity of costly air conditioning, thereby mitigating both expenses and environmental impact.

Digital Signal Processing (DSP) Architecture:
Our advanced DSP architecture ensures superior circuit integration, guaranteeing reliability and minimizing service disruptions.

The Implications?

Environmental Stewardship: By curbing the need for frequent service calls and maintenance visits, we actively diminish carbon emissions throughout the product lifecycle.

Reduced Operational Expenditure (OPEX):
Not only do you contribute to environmental sustainability, but you also achieve substantial savings in operational costs, fostering long-term business sustainability.

Applications

1. Wireless, Fiber, and Fixed Line Telecommunications:

Modern telecommunication systems demand more than mere raw DC power. They necessitate compact, reliable, and cost-effective power systems that are low on initial capital expenditure (CAPEX) and offer reduced operational expenditure (OPEX). The HSR483_UHE meets these requirements and exceeds expectations. With world-class power density, exceptional reliability, a near-flat efficiency curve, and its innovative sleep mode for power management during low-traffic periods, the HSR483_UHE truly delivers.

2. Broadband and Network Access:

As network bandwidth requirements continue to rise, network providers seek expandable and flexible DC powering solutions. Our new generation of systems, including the HSR483_UHE rectifier, serves as the foundational elements for meeting all your requirements.

3. Size Matters Not:

Thanks to its high-power density and intelligent digital system architecture, HSR483_UHE rectifiers can be seamlessly integrated into system solutions ranging from 3kW to 120kW, ensuring cost-effectiveness and adaptability to diverse needs.


Harmer & Simmons: Approach your local Harmer & Simmons representative for further support.


Contact details can be found on: **www.harmer-simmons.com**


HSR483_UHE – Technical data in this document does not contain any binding guarantees or warranties. Content only serves for information purposes and can be modified at any time. We will make binding commitments only upon receipt of concrete enquiries and customer notification of the relevant conditions. Due to the non-binding nature of these terms, we assume liability neither for the accuracy nor completeness of the data provided here.


SPECIFICATIONS

AC Input		DC Output	
Input Voltage (Nominal)	110VAC / 220VAC	**Output Voltage**	-42 to -58VDC, rated: -53.5VDC
Input Voltage Range	85 to 290VAC	**Peak Efficiency**	98±0.1%
Max Input Current	16A	**Maximum Capacity**	3000W
Input Frequency	45 to 66Hz	**Maximum Output Current**	62.5A
Power Factor	≥0.99 (220VAC @ 50% to 100% load)		
THD	≤5% @ 50% to 100% load (220VAC)		
Control and Monitor		**Environment**	
Communication Protocol	CAN	**EMC**	EN55032 class A; EN55035; IEC61000-3-2; IEC61000-3-3
LED	Green-normal; Yellow-alarm; Red-fault	**Safety**	CE、UL、UL-CB、UL62568-1; EN62568-1; IEC62368-1

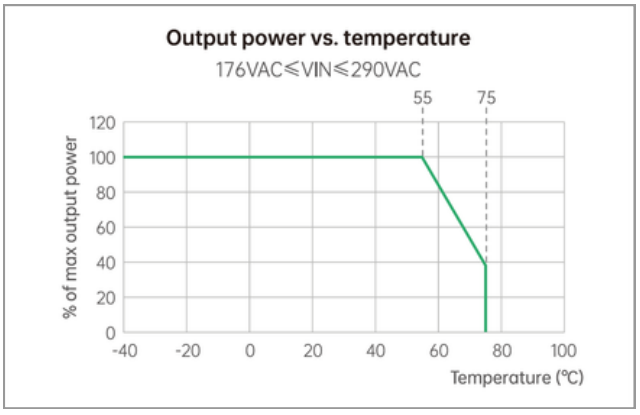

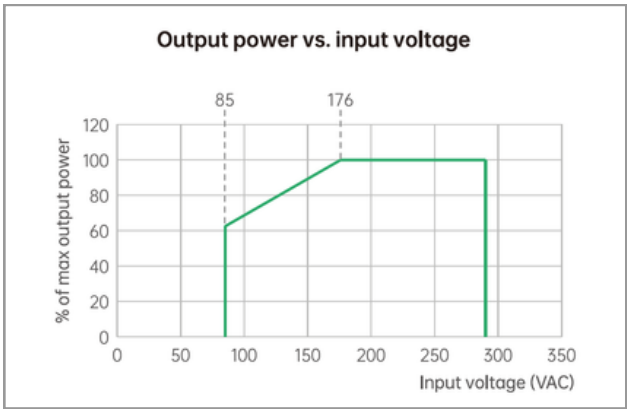

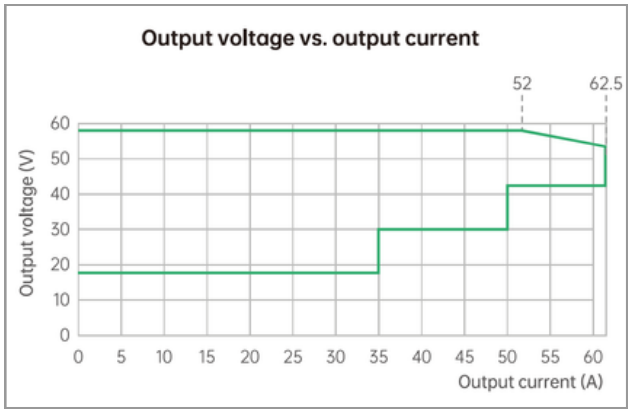

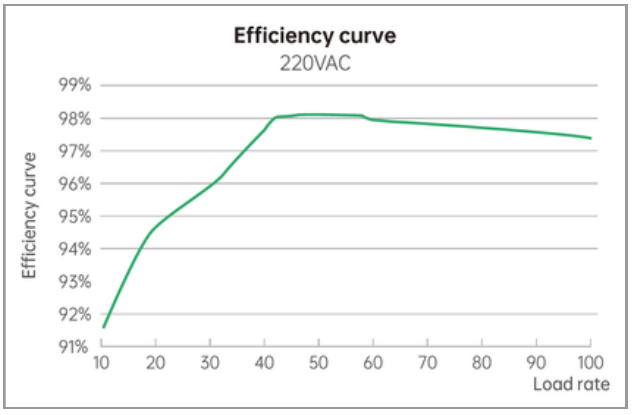

Harmer & Simmons: Approach your local Harmer & Simmons representative for further support.

Contact details can be found on: **www.harmer-simmons.com**

HSR483_UHE – Technical data in this document does not contain any binding guarantees or warranties. Content only serves for information purposes and can be modified at any time. We will make binding commitments only upon receipt of concrete enquiries and customer notification of the relevant conditions. Due to the non-binding nature of these terms, we assume liability neither for the accuracy nor completeness of the data provided here.